

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 January 2004 (08.01.2004)


PCT

(10) International Publication Number
WO 2004/002615 A1

- (51) International Patent Classification⁷: **B01F 13/00**, A61F 2/46
- (74) Agent: **STRÖM & GULLIKSSON INTELLECTUAL PROPERTY CONSULTING AB**; P O Box 4188, S-203 13 Malmö (SE).
- (21) International Application Number: **PCT/SE2003/001070**
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 23 June 2003 (23.06.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0202018-8 28 June 2002 (28.06.2002) SE
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant (*for all designated States except US*): **MEN-TORKRAFT** [SE/SE]; Siriusgatan 12, S-224 57 Lund (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): **GREBIUS, Staffan** [SE/SE]; Siriusgatan 12, S-224 57 Lund (SE).
- Published:
— with international search report

[Continued on next page]

(54) Title: **DEVICE FOR MIXING AND DELIVERING BONE CEMENT**

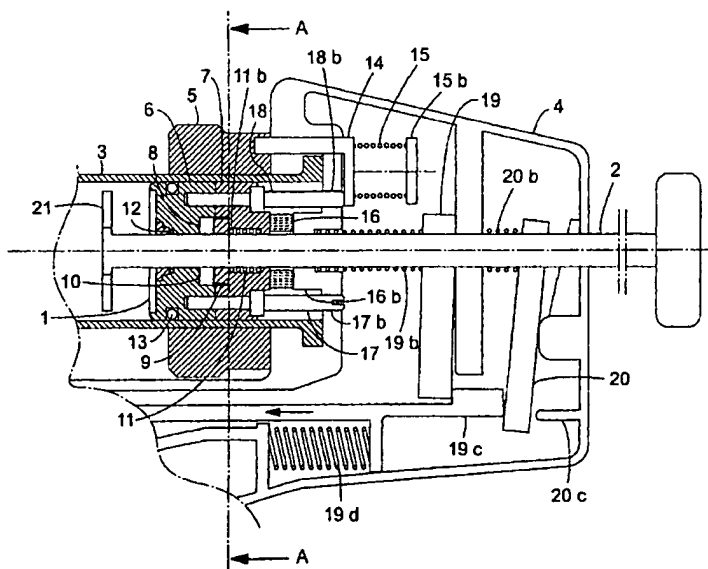

(57) Abstract: Device for mixing and applying a paste such as bone cement or the like, including a cylinder (3) receiving the paste, a piston (1) reciprocable in the cylinder (3), a piston rod (2) displaceable and rotatable in the piston (1) and forming mixing means (21) for paste received in the cylinder (3), and latch means for interconnecting the piston (1) and the piston rod (2) to allow displacement of the piston (1) in the cylinder (3) by means of the piston rod (2) for deposition of the paste outside the cylinder (2), characterized in that means are provided for locking the piston rod (2) to the piston (1) by jamming, said means allowing the piston rod (2) to be locked to the piston (1) at any position along the complete length of the piston rod (2).

WO 2004/002615 A1

WO 2004/002615 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

TITLE OF THE INVENTION DEVICE FOR MIXING AND
DELIVERING BONE CEMENT

5

SUMMARY OF THE INVENTION

This invention relates to a device for mixing and
delivering pastes that require mixing prior to delivering,
10 and more particularly to a single use device that is able
to handle high viscosity pastes, like e.g. bone cement.

The device is of the type including means for mixing
and applying a paste such as bone cement or the like,
including a cylinder receiving the paste, a piston
15 reciprocable in the cylinder, a piston rod displaceable and
rotatable in the piston and forming mixing means for paste
received in the cylinder, and latch means for
interconnecting the piston and the piston rod to allow
displacement of the piston in the cylinder by means of the
20 piston rod for deposition of the paste outside the cylinder

BACKGROUND OF THE INVENTION

Bone cement is used e.g. in connection with surgical
replacement of a hip joint. Bone cement generally consists
25 of akrylate plastic, which is biocompatible. Depending on
the use, bone cement has got different viscosity
characteristics. For use in connection with hip joint
replacements, the viscosity is often quite high, whereas
the bone cement used for e.g. spinal disc enhancements has
30 lower viscosity. This invention mainly relates to mixing
and application of bone cements with higher viscosity, but
is just as useful for low viscosity applications.

For simplicity, the term bone cement will be used
throughout this application, although the invention can be
35 used for any other kind of paste that requires mixing prior
to application.

Presently, mixing of bone cement ingredients is mostly done in a separate vessel, whereupon the mixed bone cement is put into a bone cement applicator that generally is made of stainless steel. This method has some severe
5 drawbacks:

1. Mixing of the bone cement should preferably be performed under vacuum, since low ambient pressure reduces the presence of gas impurities in the bone cement, that leads to a connection with reduced
10 strength. The vacuum treatment is often performed after the components of the bone cement have been mixed. Applying the prior art method, the mixed (and vacuum treated) bone cement must be put into an applicator, which increases the risk of adding
15 gas impurities to the bone cement.
2. The applicator is usually not of single use type, which makes it necessary to disassemble the applicator to be able to clean it and sterilize it properly after it has been used. Additionally, the
20 applicator wears down by time.

The object of this invention is to provide a single use mixer/applicator in which the bone cement is mixed under vacuum and that is capable of handling bone cement with high viscosity.
25

BACKGROUND ART

US-A-5,951,160 discloses a bone cement applicator that uses the piston rod as the bone cement mixing means. After the mixing has been performed, the piston rod is
30 withdrawn towards the piston, whereupon two wings on the distal end of the piston rod are passed through a slot in the piston to be introduced into a cavity therein. Then, the rod is rotated slightly and the piston rod becomes secured to the piston by the wings received in the cavity.

This prior art device is simple, but has got some severe drawbacks:

1. It is not possible to use the device for high viscosity bone cement, since high viscosity bone cement will clog the slot in the piston and make it impossible to engage the wings on the piston rod with the piston.
2. The mixing cannot be performed under vacuum, since there are no withholding means for the piston that prevents the piston from being displaced in the cylinder by the force of the vacuum.
3. The mixing quality is poor, since there are only two wings on the end of the piston rod.

Additionally, the applicator according to US-A-5 951 160 is not provided with means facilitating the extrusion of bone cement from the cylinder, which means that the device must be put into some kind of device to facilitate the extrusion of the bone cement.

US-A-5,398,483 discloses a device and a method for application of bone cement, wherein the bone cement components are contained separated in a cartridge. When the bone cement is to be used, the sealing between the cartridge compartments is opened to allow the bone cement components to be mixed in the cartridge. After mixing the cartridge is placed in an applicator gun. This method has one large disadvantage: it is not possible to use any kind of additional components (like e.g. antibiotics), since the bone cement comes in a prepackaged, sealed cartridge.

Cem-Vac Inc. sell a combined device in which a piston for extruding the bone cement is located at one end of a cylinder and a piston for mixing the bone cement is located at the other end of the cylinder. The bone cement components are supplied to the cylinder through a hollow mixing piston rod. After the mixing is complete, the device

is placed in a pistol grip applicator, and the hollow piston rod is used as an applicator nozzle.

The prior art devices mentioned above use a separate pistol grip applicator for applying the required pressure
5 to the bone cement.

The present invention aims to overcome the abovementioned and other problems by providing a device in which the bone cement can be mixed under vacuum, which includes means for facilitating the application, and which
10 can be discarded after use.

SUMMARY OF THE INVENTION

The present invention provides a device for mixing and delivering bone cement of the kind referred to above,
15 which is characterised in that means are provided for locking the piston rod to the piston by jamming, said means allowing the piston rod to be locked to the piston at any position along the complete length of the piston rod.

Preferred details of the invention are defined in the
20 dependent claims.

INDUSTRIAL APPLICABILITY

As the population in the world's industrialised parts grow older, the need for different surgical corrections of
25 the shortcomings of the human body becomes more intense. For example, 15000 hip and knee joint replacements occur in Sweden only, every year. For most of these hip or knee joint replacements, bone cement is used for fastening the man-made hip or knee joint in the medullary canal of femur.

30 Since the speed at which the surgeon can work is important from a number of views, it is of importance to provide a device in which the bone cement can be mixed and from which the bone cement can be deposited. It is also of importance that the device can be discarded after use, so

that no personnel resources must be used for cleaning and disinfecting the device after use.

BRIEF DESCRIPTION OF THE DRAWINGS

5 Fig. 1 and 2 are fragmentary axial cross sectional views of the proximal end portion of the device showing the interaction between the piston and the piston rod.

Fig. 3 is a fragmentary enlarged axial cross sectional view showing the interlocking between the piston
10 and the piston rod.

Fig. 4 is a cross sectional view taken along line A-A in fig 1.

Fig. 5 and 6 are fragmentary axial cross sectional views showing the interaction between the piston and an
15 external ring.

Fig. 7 a-e show five different operation steps of the device.

DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT

20 Fig 1 shows a piston 1, a piston rod 2, a proximal end portion of a cylinder 3 and a part of a main housing 4. On the outside of the cylinder 3 an external ring 5, rotatable on the cylinder, is provided. The piston is divided into a front component 6 and a back component 7,
25 which engage each other at plane surfaces. In each of the piston components 6, 7 there is provided in plane surface, a recess 8,9, respectively, which recesses 8,9 are placed at an angle with respect to each other, as shown in fig 4. A lock member 10 with a central opening through which the
30 piston rod 2 is displaceably received is located in recess 9 and is biased by a helical pressure spring 11, housed in a recess 11b in the back component 7 of the piston 1, to rest upon the surface of the front component 6 of the piston 1.

The front component 6 of the piston 1 is provided with sealing means 12,13, which seal the connections piston 1/cylinder 3 and piston 1/piston rod 2.

Ring securing means 14 are provided to prevent the
5 ring 5 from being rotated. The ring securing means 14 is biased by a helical pressure spring 15, which rests upon an abutment 15b in the housing 4. Behind the piston 1, an elastic body 16 is provided, that rests between a tubular boss 16b formed by the housing, and the back component 7 of
10 the piston 1. The piston rod 2 is slidable through all components of the piston 1.

Two pins 17,18 are provided to prevent the front component 6 of the piston 1 from rotating by being firmly attached to the front component 6 of the piston 1, and run
15 in two holes 17b, 18b provided in the main housing 4. Except from serving as means preventing the front component 6 of the piston 1 from rotating, the pins 16, 17 also serve to hold the piston components 6,7 together. The back component 7 of the piston 1 is provided with two slots 23,
20 23b (see fig 4), formed to allow the back component 7 to rotate with respect to the front component 6.

On the front end of the piston rod 2 mixing means 21 are provided. The mixing means 21 act to mix the constituents of the paste housed in the cylinder 3 upon
25 reciprocal movement and rotation of the piston rod 2, and may be in form of several radial wings extending from the distal end of the piston rod 2.

In fig. 2, the piston 1 has been pulled backwards by force applied to the piston rod 2, compressing the elastic
30 body 16, the ring securing means 14 being lifted from recesses 22 in the external ring 5, which makes it possible to rotate the external ring 5. Since the external ring 5 is connected to the back component 7 of the piston 1 by means of small pins 24,25 (shown in fig 5), the back component 7
35 will rotate as well, which is allowed by the design of

slots 23 (shown in fig 4). As the back component 7 of the piston 1 is rotated by rotating the external ring 5, and the front component 6 is held against rotation by the pins 16, 17, the recesses 8,9 will overlap. This leads to the
5 lock member 10 falling down into the recess 8 in the front component 6 of the piston 1. The lock member 10 falling down into the recess 8 irreversibly locks the piston 1 to the piston rod 2 in the forward direction. It is however possible to let the piston 1 slide along the piston rod 2
10 towards the proximal end of the device. As will be explained below, this is advantageous in some aspects.

The locking action between the lock member 10 and the piston rod 2 is shown in figure 3, which shows the lock member 10 interacting with the recess 8 in the front
15 component 6 of the piston 1. Since the lock member 10 is supported on only one side, laterally displaced from the centre axis of the piston rod 2, the lock member 10 jams the piston rod 1 in the forward direction.

Fig. 4 shows the lock member 10 in its recess 9 in
20 the back component 7 of the piston 1 before it has fallen down into the recess 8 in the front component 6 of the piston 1. Also shown is (dashed) the contour of the recess 8 in the front component 6 of the piston 1. Furthermore, the position of the two pins 17, 18 and their corresponding
25 slots 23 in the back component 7 of the piston 1 are shown. The two small pins 24 and 25 connect the external ring 5 with the back component 7 of the piston 1.

As the piston 1 is locked to the piston rod 2, the extrusion of paste from the cylinder 3 can be started by
30 starting to move the piston 1 forward by means of the piston rod 2. As the piston 1 moves forward, the connection between the piston 1 and the main housing 4 by the pins 16,17 releases, just as the connection between the external ring 5 and the back component 7 of the piston 1.

Fig 5 shows an example of how the interaction between the external ring 5 and the back component 7 of the piston 1 can be designed. The two small pins 24, 25 are received in two open slits, one of which is shown at 26, in the back component 7 of the piston 1. The two slits are open to allow forward motion of the piston 1.

Two open slits, one of which is shown in fig 6 at 26, are provided each with a restriction, one of which is shown at 28. The restrictions serve to restrict forward motion of the piston 1 without applying a substantial force to the piston 1. They also serve to give a distinct click as the piston 1 commences its travel forward to extrude the paste housed in the cylinder 3, and thereby tells the user that the unit is ready for applying the paste.

All details mentioned above are housed in the main housing 4 including pressing means 19 and locking means 20 that act on the piston rod 2. The pressing means 19 are biased by a helical pressure spring 19b, one end of which acts on the tubular boss 16b, the other end on the pressing means 19. The helical pressure spring 19b serves to press the pressing means 19 towards the proximal end of the device. The locking means 20 are spring loaded by a helical pressure spring 20b, which presses the locking means 20 backwards. The locking means 20 can be deactivated by being pressed towards the projection 20c. Both the pressing means 19 and the locking means 20 are actuated by a bar 19c, that in turn is connected to some kind of power grip, e.g. a pistol grip.

The function of the pressing 19 and locking means 20 is as follows: When the power grip is actuated, the bar 19c will travel forward (in the direction of the arrow shown in fig 1), activating the locking means 20 by releasing said means from the projection 20c, biased by the helical pressure spring 20b. Simultaneously, the bar 19c acts on the pressing means 19, which leads to a jamming effect

between the pressing means 19 and the piston rod 2,
pressing the piston rod 2 forward under compression of the
helical pressure spring 19b. During the forward moving
procedure of the piston rod 2, the locking means slide
5 along the piston rod 2.

As the power grip is released, the jamming effect
between the pressing means 19 and the piston rod 2
discontinues, which leads to the helical pressure spring
19b pressing the pressing means 19 back along the piston
10 rod 2. If the power grip is totally released, the bar 19c
will remove the jamming action between the locking means 20
and the piston rod 2 by forcing (the force emanating from
helical pressure spring 19d) the locking means 20 towards
the projection 20c.

15 In the position where the power grip is totally
released, the piston rod 2 is not in any way restricted
from being pushed and pulled back and forth (or being
rotated) through the components in the main housing,
allowing mixing of the paste constituents

20 In the following, the function of the device will be
described, with reference to the components mentioned
above, and to fig. 7.

In the first step, the components of the paste that
is to be mixed and applied are introduced into the cylinder
25 3. After the paste components have been received in the
cylinder 3, the cylinder 3 is connected to a vacuum source
P, that reduces the presence of gases in the paste, both
such gases that emanate from air being mixed into the paste
and gases that are formed as a result from the curing
30 process of the paste.

By pushing and pulling the piston rod 2 back and
forth and rotating it, the mixing means 21 on the distal
end of the piston rod 2 mixes the components of the paste.
These operational steps are shown in figs. 7a and b.

The next sequential step is to lock the piston rod 2 to the piston 1. This is accomplished by pulling the piston rod 2 forcefully backwards and simultaneously turning the external ring 5, as shown in fig 7c.

5 In figure 7d, the power grip is actuated, leading to the piston being pushed forward, whereby the paste fills out any empty spaces in the cylinder 3, as the vacuum source P is still connected to the cylinder.

10 In fig 7d, the vacuum source P is disconnected from the cylinder 3 and a nozzle is attached to the front end of the cylinder 3. The nozzle can have different configurations depending on what kind of application the device should be used for.

15 If the piston rod 2 would slip forward without taking the piston 1 forward and hence not extrude any paste, the piston rod 2 can be retracted and the extrusion of paste can be recommenced.

20 One very important feature of the function of the device is that it is not necessary that the piston rod 2 is completely withdrawn towards the piston 1 to be able to lock the piston 1 to the piston rod 2, as is the case with the prior art device described in US-A-5,951,160. If enough force is applied to the piston 1, it is possible to turn the external ring 5 and hence lock the piston 1 to the
25 piston rod 2. This feature is very important, since it makes it possible to lock the piston 1 to the piston rod 2 even if high viscosity paste would make it too hard to pull the piston rod 2 so far that the mixing means 21 comes in physical contact with the piston 1.

30 One further advantage with the embodiment in which a lock member 10 is falling down into a recess 8 is that it irreversibly locks the piston 1 to the piston rod 2, which prevents the unit from being used more than once.

CLAIMS

1 Device for mixing and applying a paste such as bone
cement or the like, including a cylinder (3) receiving the
paste, a piston (1) reciprocable in the cylinder (3), a
5 piston rod (2) displaceable and rotatable in the piston (1)
and forming mixing means (21) for paste received in the
cylinder 3, and latch means for interconnecting the piston
(1) and the piston rod (2) to allow displacement of the
piston (1) in the cylinder (3) by means of the piston rod
10 (2) for deposition of the paste outside the cylinder (2),
characterized in that means are provided for locking the
piston rod (2) to the piston (1) by jamming, said means
allowing the piston rod (2) to be locked to the piston (1)
at any position along the complete length of the piston rod
15 (2).

2 Device according to claim 1, **characterized** in that
the device is a single use device.

3 Device according to claim 1, **characterized** in that
the piston is divided into front (6) and back (7)
20 components rotatable relative one another.

4 Device according to claim 1, **characterized** in that
the cylinder (3) is gas tight, which enables mixing of the
paste under vacuum.

5 Device according to claim 1, **characterized** in that
25 the jamming means in the piston (1) include a lock member
(10) with a central hole receiving the piston rod, which
member (10) in the jamming position is supported in a
position laterally displaced relative to the centre axis of
the piston rod (2).

30 6 Device according to claim 1, **characterized** in that
an external ring (5) or the like on the cylinder is
rotatable for locking of the piston (1) to the piston rod
(2).

7 Device according to claim 6, **characterized** in that
35 the external ring (5) or the like is secured by securing

means (14), to prevent the ring (5) from being turned accidentally.

8 Device according to claim 6, **characterized** in that the piston rod (2) is restricted from being pulled
5 backwards by an elastic body (16) provided behind the piston (1).

9 Device according to claim 1, **characterized** in that the piston (1) is provided with sealing means (12, 13) to ensure the gastightness of the cylinder (3).

10 10 Device according to claim 1, **characterized** in that single use is guaranteed by irreversibly locking the piston (1) to the piston rod (2).

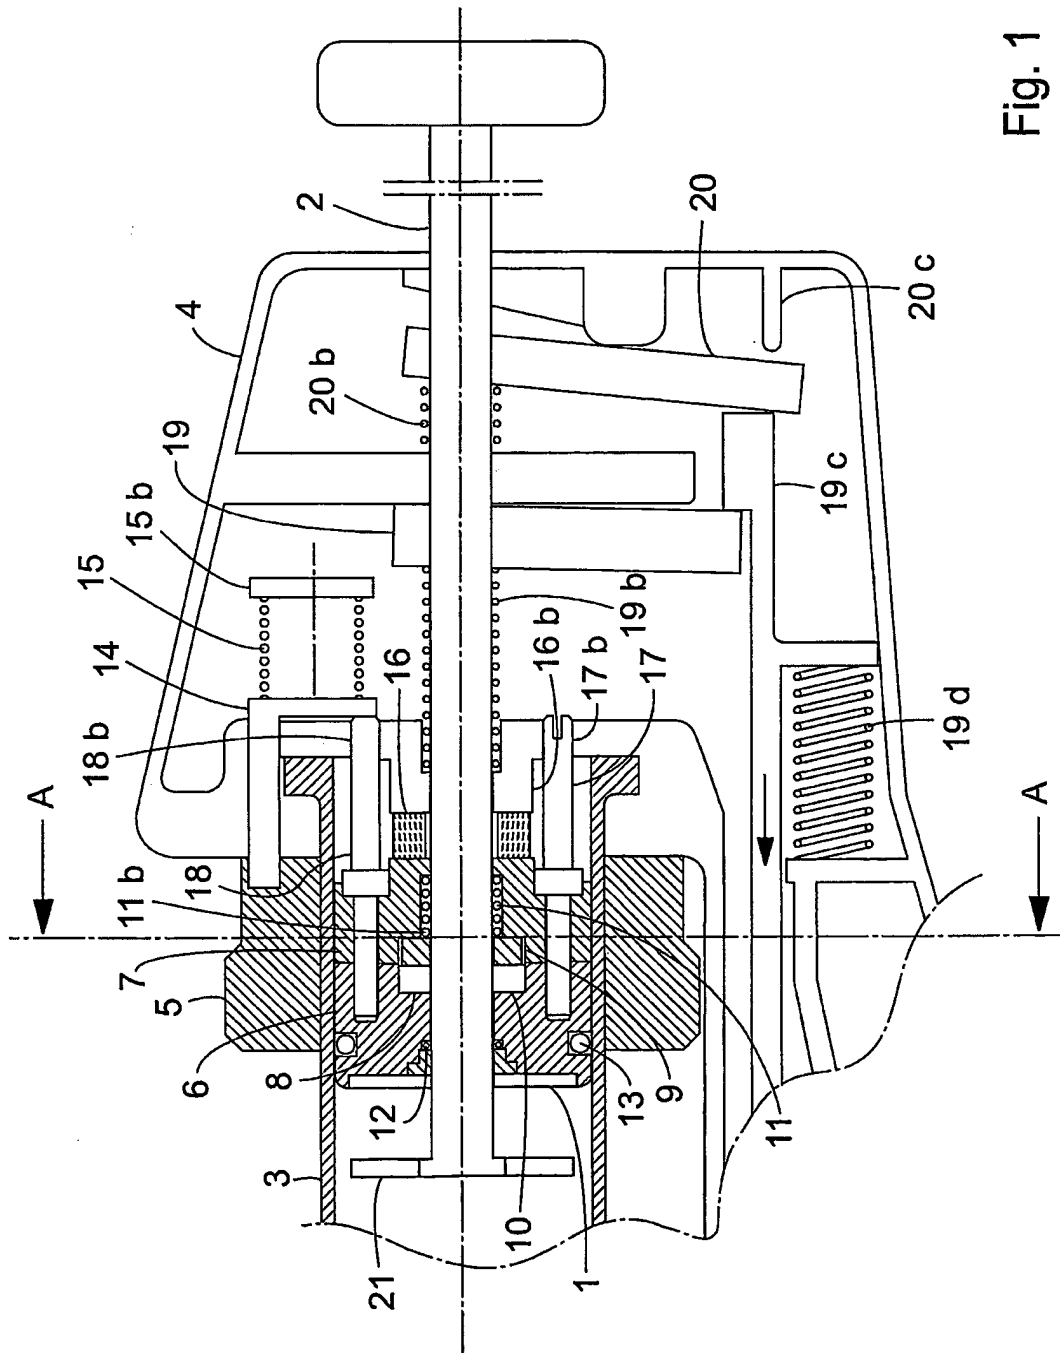


Fig. 1

2/7

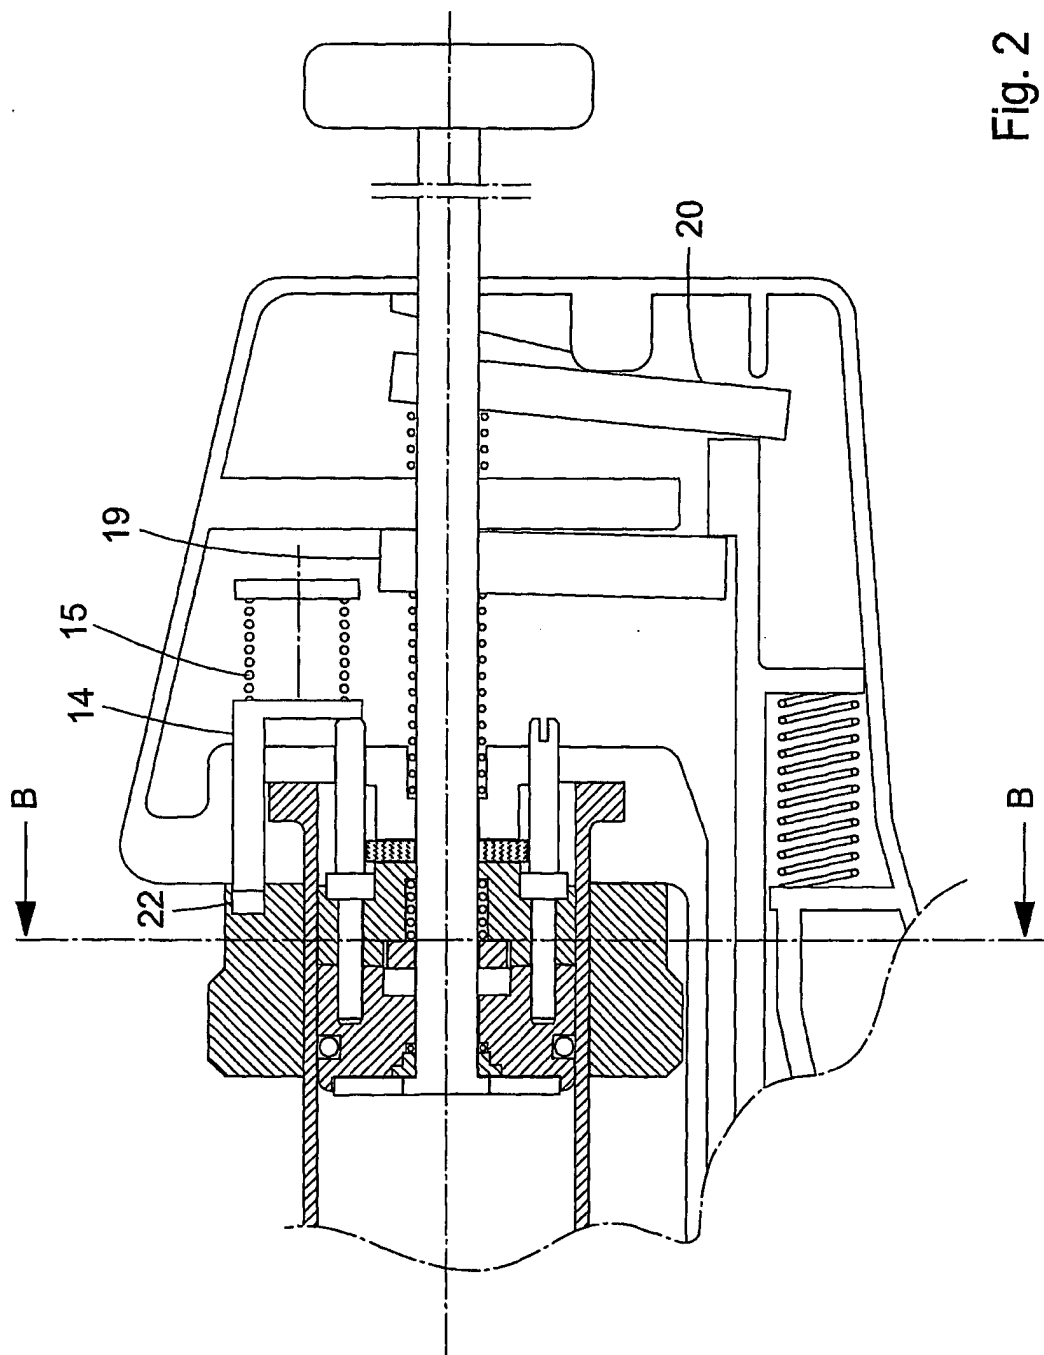


Fig. 2

3/7

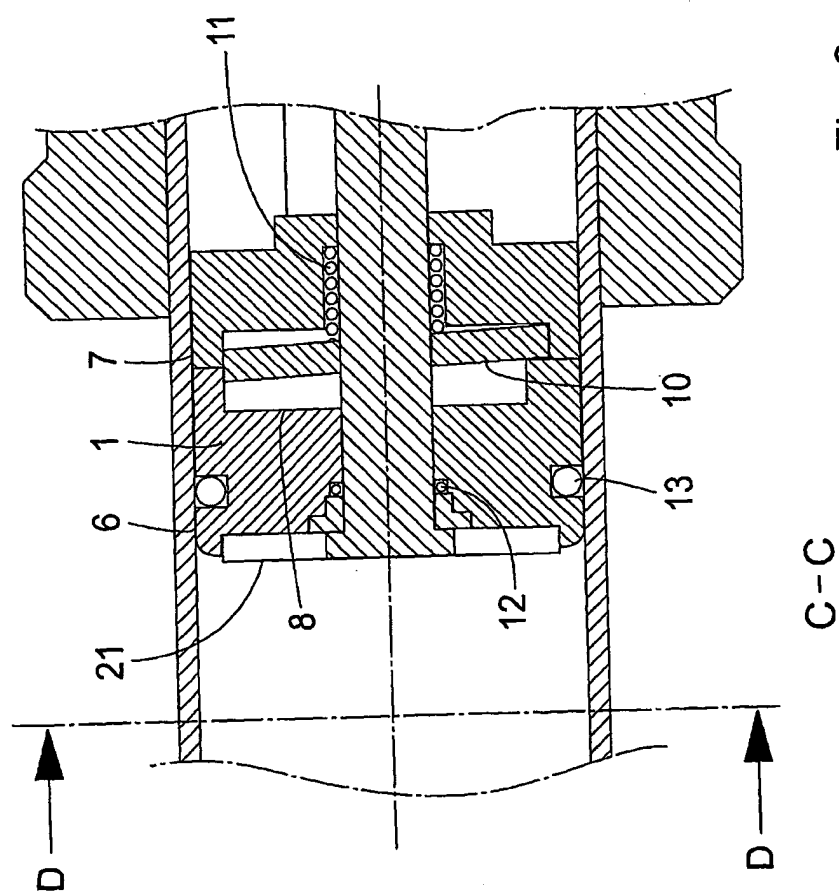


Fig. 3

4/7

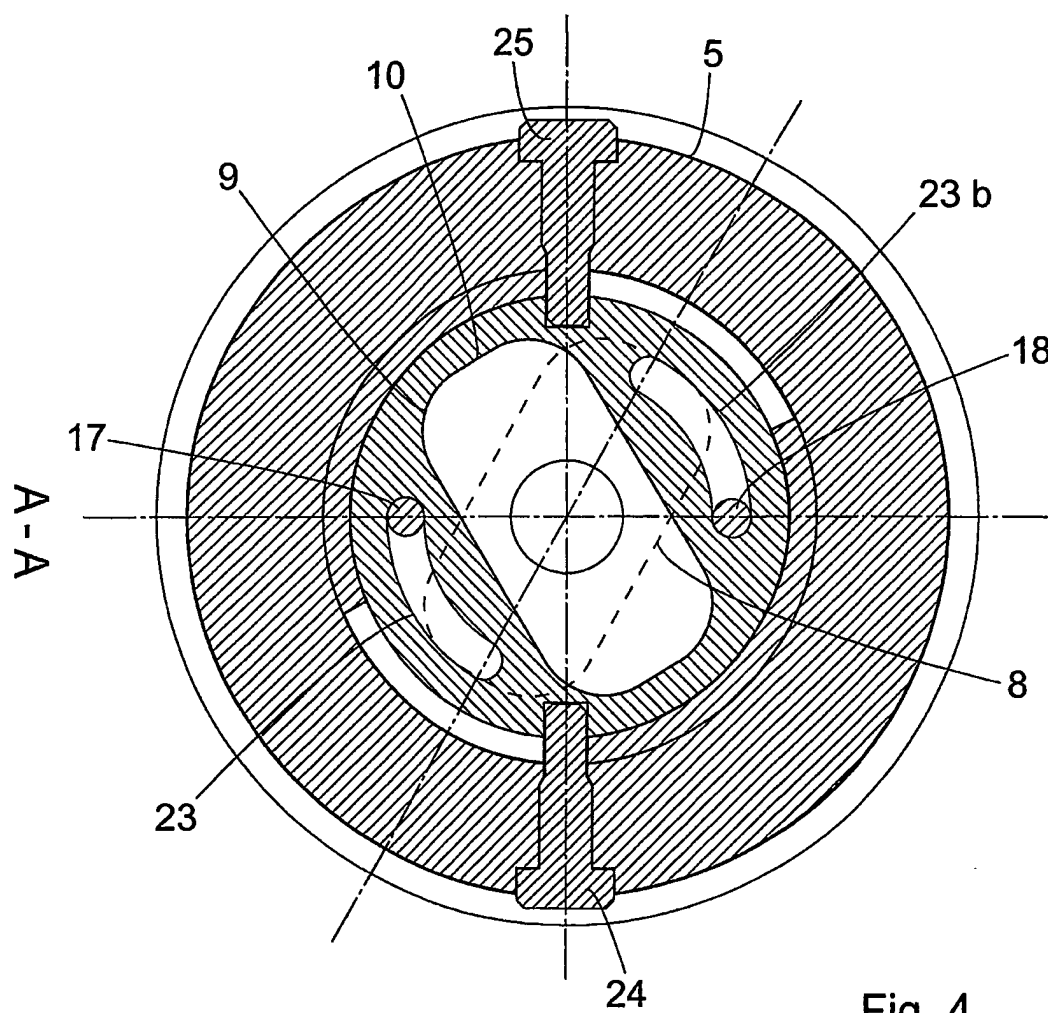


Fig. 4

5/7

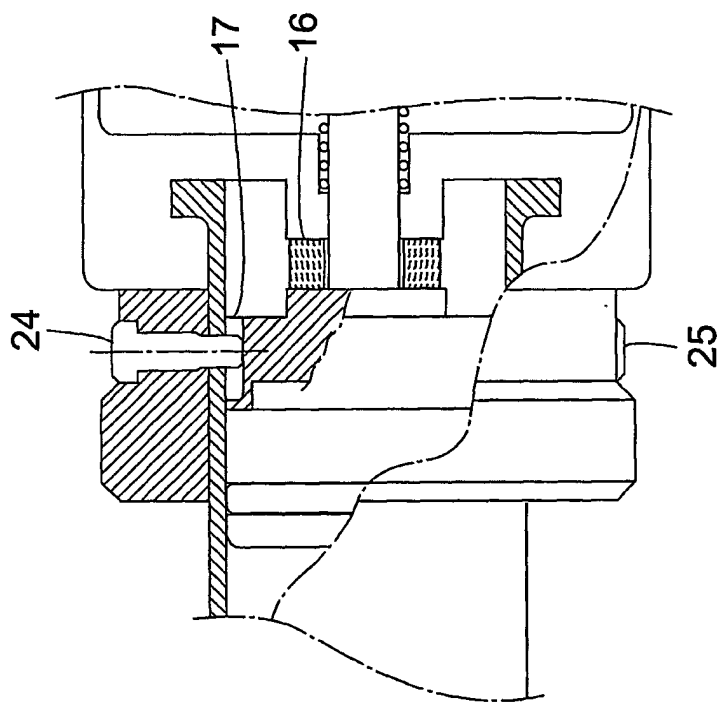


Fig. 5

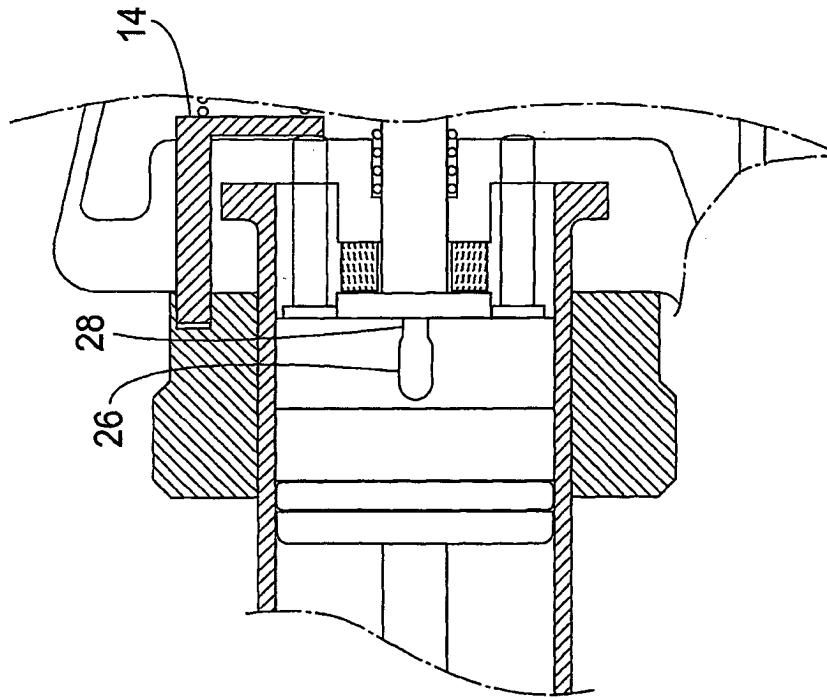


Fig. 6

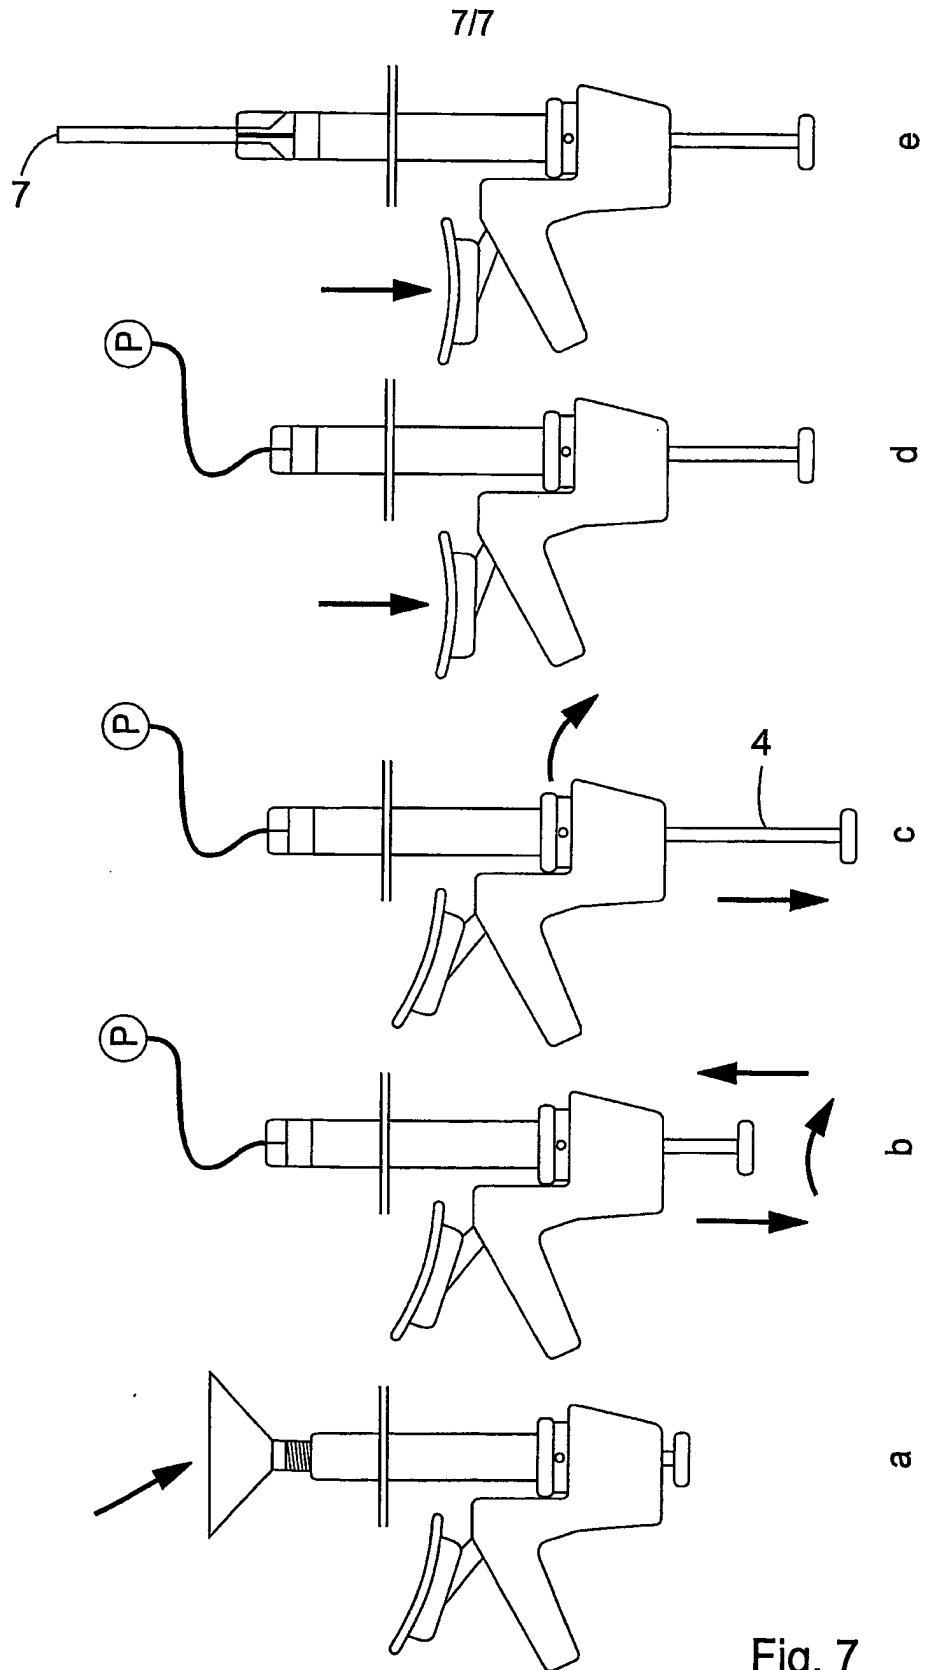


Fig. 7

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 03/01070

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: B01F 13/00, A61F 2/46

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: B01F, A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 0183094 A1 (MARINO, JAMES, F.), 8 November 2001 (08.11.01), figure 1, claims 11,14	1,2,4
A	-- -----	3,5-10

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

11 Sept 2003

Date of mailing of the international search report

12 -09- 2003

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Wiva Asplund/MP

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 03/01070

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
WO	0183094	A1	08/11/01	AU	5753801 A	12/11/01
				US	6406175 B	18/06/02
